




MODEL 5001

DEMAND FLOW REGULATOR-C10-BRASS NP

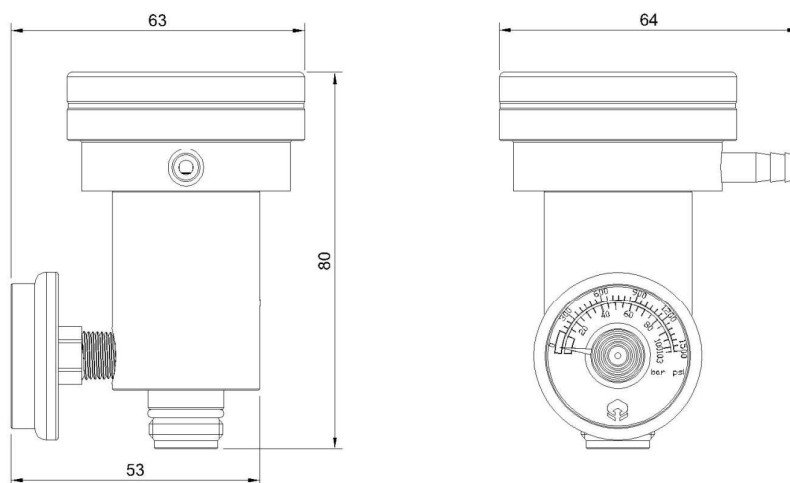

The Demand Flow Regulator-C10 is used for calibration gases, pump based instruments and handheld gas detectors. These regulators supply gas as demanded by the instrument and automatically shuts off.

Materials of construction

Body	Stainless Steel
Neck	Brass NP
Piston	Brass
Seats and Seals	Teflon, Viton & Buna-N
Diaphragm	Buna-N

Model	Maximum Inlet Pressure	For Reactive Gases and/or Non-Reactive gases	Maximum Vacuum Required For 3.0L/MN Flow	Inlet Connection	Outlet Connection	Gauge	Weight Kg
5001	0 to 1200 psig/ 83 bar	Brass NP for Non-Reactive Gases	0 to 3" H2O /5.6 mm Hg	5/8"x18UN C10	3/16" Barb 4.8mm	Brass 0 to 1500 psig 103 bar	0.450 Kg

Warranty:- All regulators are warranted for 12 months.