




## MODEL 902

### FIXED FLOW REGULATOR-C10-BRASS NP

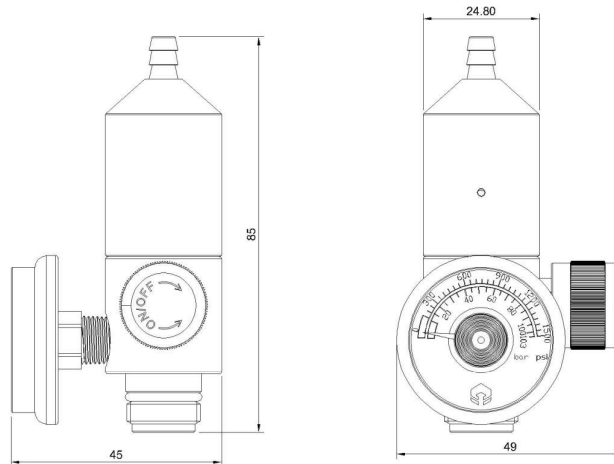

The Fixed flow regulator-C10 uses a single stage design which allows the end user to obtain a preset constant flow rate. They are used with 17L and 34L cylinders. Used for calibration gases and handheld gas detectors.

#### Materials of construction

Body	Stainless Steel
Cap	Brass Nickel Plated
Piston	Brass
Seats and Seals	Teflon, Viton
Flow	Fixed as per customers requirement - 0.1 to 8.0 L/Mn

Model	Maximum Inlet Pressure	For Reactive gases and/or non-reactive gases	Inlet Connection	Outlet Connection	Outlet Pressure	Gauge	Weight Kg
902	0 to 1200 Psig / 83 bar	Brass NP- for Non-Reactive Gases	5/8"x18UN C10	3/16" Barb 4.8mm	60 psig- 4.1bar	Brass 0 to 1500psig 103 bar	0.300 Kg

**Warranty:-** All regulators are warranted for 12 months.