




MODEL 903

P/N CGW903-SS0.5

FIXED FLOW REGULATOR-C10-STAINLESS STEEL 1.0 LPM

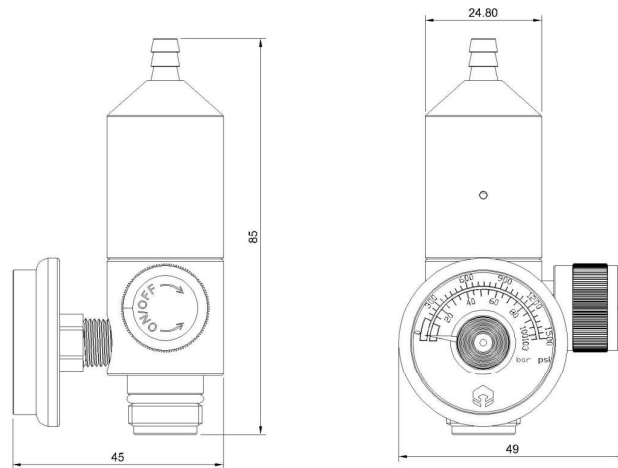

The Fixed flow regulator-C10 uses a single stage design which allows the end user to obtain a preset constant flow rate. They are used with 17L and 34L cylinders. Used for calibration gases and handheld gas detectors.

Materials of construction

Body	Stainless Steel
Cap	Stainless Steel
Piston	Stainless Steel
Seats and Seals	Teflon, Viton
Flow	Fixed as per customers requirement - 0.1 to 8.0 L/Mn

Model	Maximum Inlet Pressure	For Reactive gases and/or non-reactive gases	Inlet Connection	Outlet Connection	Outlet Pressure	Gauge	Weight Kg
903	0 to 1200 Psig / 83 bar	Stainless Steel for Reactive Gases	5/8"x18UN C10	3/16" Barb 4.8mm	60 psig- 4.1bar	Stainless Steel 0 to 1500psig 103 bar	0.280 Kg

Warranty:- All regulators are warranted for 12 months.